



Roca

Calacata Gold

Calacata Gold

The Calacata Gold generates unique atmospheres and bright spaces offering a balance between the matte and polished finishes. Also adding warmth through its gold veining, making way for versatile combinations of elements.



Calacata Gold 24"x48" UP, 12"x24" R PO

Matte & Polished Porcelain + Ceramic Wall

◇ ▣ 24"x48 R PO - 24"x48 R UP - 12"x24" R PO - 12"x24" R UP

Calacata Gold

Matte & Polished Porcelain



24"x48" R
60x120 cm

12"x24" R
30x60 cm

12"x24"
31x61 cm

Gold



24"x48" R PO
UCALGPO2448R




24"x48" R UP
UCALGMT2448R



12"x24" R PO
FCGPER5171



12"x24" UP
FCGPPR5171

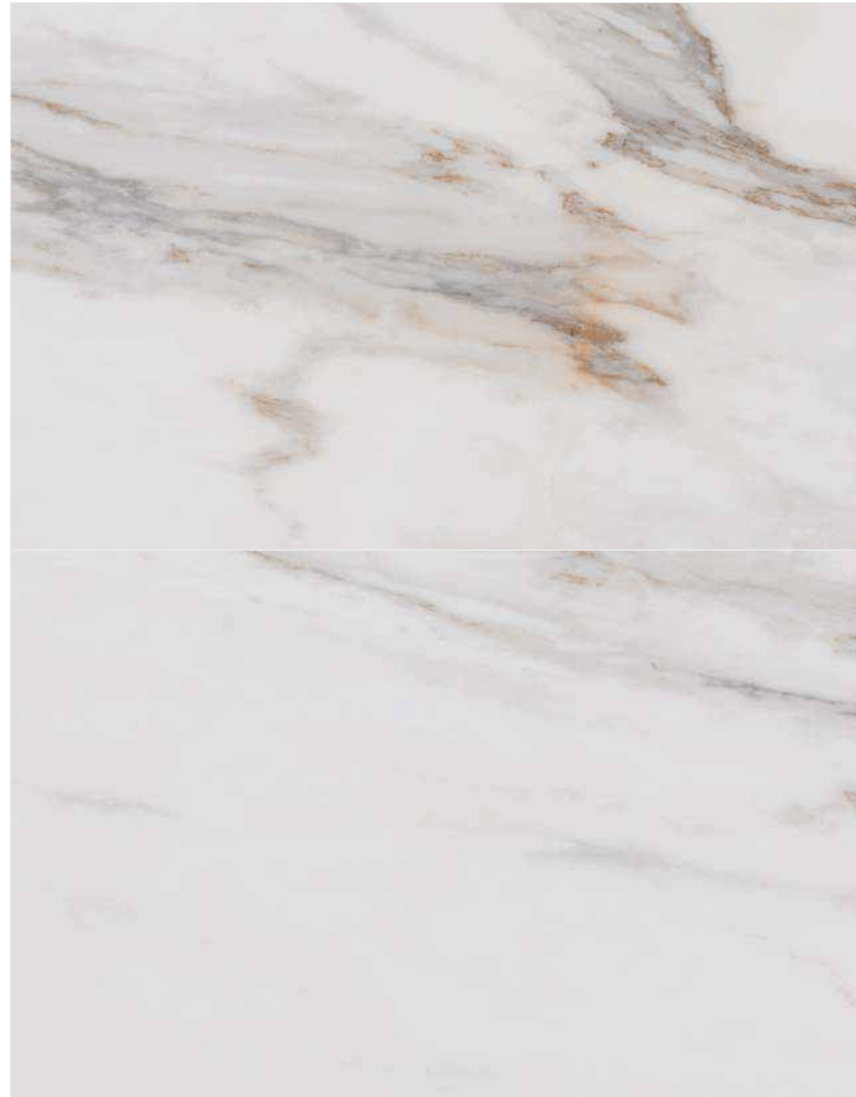

Technical Specifications - Wall

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or Exceeds
Scratch Hardness	MOH's Scale	N/A
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V3
Warpage	C485	Pass
Wedging	C502	Pass

Technical Specifications - Floor

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Matte	Polished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 335	Min. 335
Scratch Hardness	MOH's Scale	5	3
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	4	3
Deep Abrasion - Unglazed Tiles	C1043	Pass	Pass
PEI- Glazed Tiles***	C1027	4	3
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42	<=0.40
Shade and Texture Rating	CTDA "V"	V3	V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
12"x24" R PO	18.84	10	32
12"x24" UP	20.34	10	32
24"x48" R	22.93	3	27